



The HS-500 is a light weight hand-carried solution for transporting and using a Datavideo SE-500 switcher and a dual screen TLM-702 monitor as one unit.

The dual screen TLM-702 monitor is pre-wired to use one screen for selectable quad-view of each source and the other screen for program output. It's perfect for applications within education, houses of worship, internet streaming, live events, conferences and more.

CG (Character Generation) can be applied by using our Datavideo CG-100 and a Blackmagic Design Decklink® card that overlays text and graphics on the program output (via a computer).

Outputs include: Component (YUV) which could be connected to a DVD recorder or projector.





Aluminum Carrying Case

Rear View



Dimensions

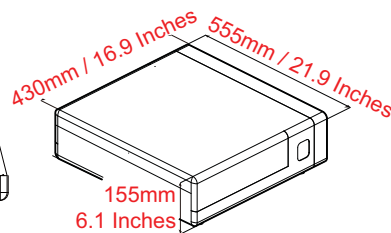

Width: 21.9 inches (555mm)
 Depth: 16.9 inches (430mm)
 Height: 6.1 inches (155mm)
 Power: 12V 4.2A DC 110/220 power supply included
 Weight: 110lb (50kg.)

Features

- Easy adjustment of the viewing angle of the high quality TLM-702 TFT LCD monitor
- Fully integrated with cable loom and power supply. Connection to video sources (such as camcorders) is made easy with the quick release pivoting back panel
- Designed to be "live-in-seconds" with easy setup, breakdown and storage at any location
- Housed in a stylish and light aluminum carrying case for easy and secure transport

Specifications

Video

- Inputs: 4x composite and S-Video
- Outputs: 2x composite and 1x S-Video OR 2x composite 1x component

Audio

- Inputs: 2x unbalanced RCA and 1/4" mic
- Outputs: 2x unbalanced RCA

Control

- RS-232 remote control interface

Monitor

- TLM-702 utilizes the SE-500 unique quad preview output on one of the high quality 7" TFT LCD monitors, while displaying the program output on the second 7" TFT LCD monitor