

PD-1 Center is specifically designed to provide a steady power supply for Datavideo Mobile Video Studio applications.

DC 12V with 1 terminal of 12V/5A XLR Output, two terminals of 12V/7A (XLR / 2.1mm In Line) DC Output, 4 terminals of 12V/4A, 2 terminals of 12V/2A and one terminal of 5V/1A DC output.

It provides a 300 watt rated power supply to cover most power requirements for a Mobile Video Studio, such as a video switcher, LCD monitors, video recorders, talk back system, and so on. With standard 19"/1U rack size design, the PD-1 makes system integration professional and reliable.



Connections

Inputs

- 4-pin XLR with 12V/300W DC
- 100-240V/12A AC (50-60Hz)

Outputs


- Two 100-240V/7A AC
- Two 12V/2A DC
- Two 12V/3A DC
- Two 12V/4A DC
- One 12V/10A DC
- One 5V/1A DC
- One 4-pin XLR with 12V/10A DC



UL 60601-1
CAN/CSA C22.2 NO. 601-1
DVD RECORDER
49LJ



Front View

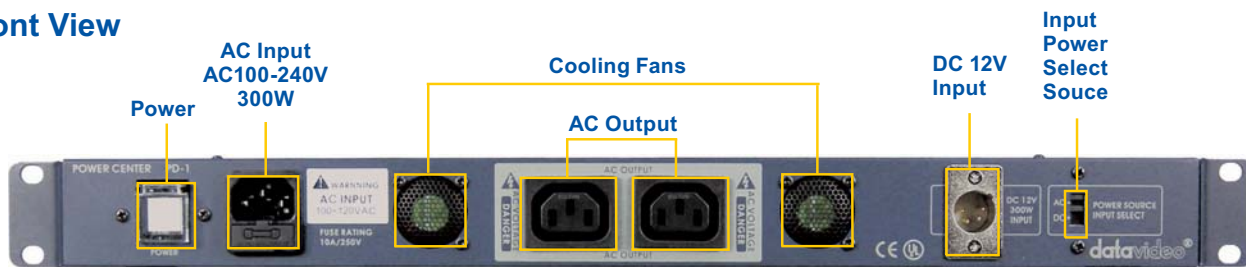

Rear View

